LEVIN
GERMANY

About us

Levin Lighting is a lighting technology brand from Europe, with the sole intention of offering innovative, sustainable lighting solutions that improve lighting quality, energy efficiency, and enhance the environment you live in. Our mission is to provide lighting solutions for indoor and outdoor applications that are not only reasonably priced but, due to our high-quality engineering and extensive research, veritably “light-up your lives.” Our products are a result of rigorous R&D and very Stringent quality measurements, expected of an international brand thanks to our highly experienced team our meticulous quality control and attention to detail at every stage of the manufacturing process are of the utmost importance in our adherence to global standards. Each material used in our final product is checked to ensure the highest quality and performance specifications. All our products incorporate our life comfort commitment, making your environment more comfortable to live in. Constant innovation is a hallmark of the LEVIN brand, and we strive to bring you consistent quality at an affordable price. Since we have a responsibility to care for and protect the environment in which we operate, we are continually looking for new methods and materials to provide environmentally friendly solutions and our dedicated R&D Team is constantly striving towards sustainable materials and enhancing our competitive edge by offering new products that strengthen our position in the marketplace. We strongly believe in building a lasting relationship with our customers through integrity and innovation and are committed to provide you with lighting products which are consistent in quality and affordable so you can bring the mood, attitude, and energy to your environment. Thank you and we look forward to your continuing patronage.

Certificates

CE RoHS ErP



LEVIN GERMANY



LEVIN
GERMANY

LED Lighting Source



7W A-Bulb



9W A-Bulb



12W A-Bulb



15W A-Bulb



20W A-Bulb



20W T-Bulb



30W T-Bulb



40W T-Bulb



50W T-Bulb



6W T-Candle



6W Candle



6W GU10 Halogen



7W GU10 Halogen

Indoor Lighting



8W Recessed Spotlight



8W Recessed Downlight



12W Recessed Downlight



15W Recessed Downlight



20W Recessed Downlight



30W Recessed Downlight



Recessed 3-Step Dimmable Downlight



9W 3-Step Tunable White Downlight



7W COB Downlight



10W COB Downlight



15W COB Downlight



20W COB Downlight



8W Adjustable Round



18W Adjustable Round



24W Adjustable Round



36W Adjustable Round

Indoor Lighting



8W
Adjustable Square



18W
Adjustable Square



24W
Adjustable Square



36W
Adjustable Square



45W Recessed 60×60 Panel



65W Recessed 60×60 Panel



45W Recessed / Surface 60×60 Panel



65W Recessed / Surface 60×60 Panel



20W Indoor Linear Light



40W Indoor Linear Light



80W Indoor Linear Light



Indoor Strip Light



Grow Light

Outdoor Lighting



30W LED Floodlight



50W LED Floodlight



100W LED Floodlight



150W LED Floodlight



100W High Bay LED Light



150W High Bay LED Light



200W High Bay LED Light



6W Wall Washer LED Light



12W Wall Washer LED Light



24W Wall Washer LED Light



20W IP66 Outdoor Linear LED Light



38W IP66 Outdoor Linear LED Light

LED Lighting Source


LEVIN
GERMANY

LED Bulb Lamps

Applications

- ✓ Residential
- ✓ Office
- ✓ Hotels
- ✓ Shops
- ✓ Museums



A-Bulb LED Lamps



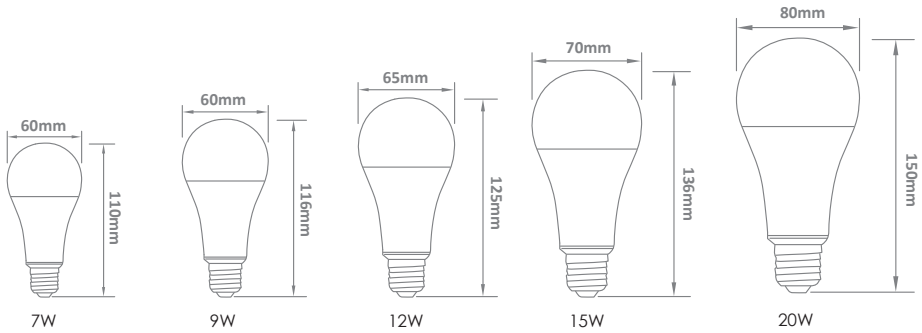

2700 to 10000 °K



Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × L	Cap
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm	
A-Bulb LED Lamp	7	10965	6500	700	100 ~ 105	> 70	> 80	< 7	220°	58	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	26	60 × 110	E27
		10930	3000	665	95 ~ 100												
	9	10165	6500	900	100 ~ 105					75					30	60 × 116	
		10130	3000	855	95 ~ 100												
	12	10265	6500	1140	95 ~ 100					100					38	65 × 125	
		10230	3000	1080	90 ~ 95												
	15	11065	6500	1425	95 ~ 100					124					42	70 × 136	
		11030	3000	1350	90 ~ 95												
	20	10465	6500	1935	95 ~ 100					150	175 ~ 265				61	80 × 150	
		10430	3000	1800	90 ~ 95												

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



T-Bulb LED Lamps



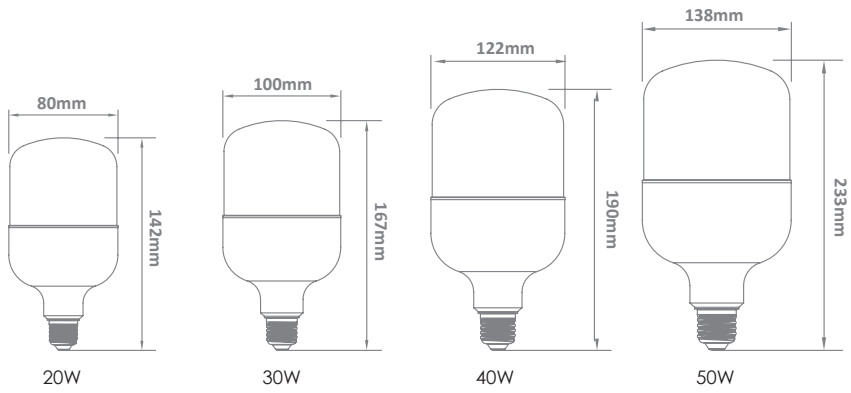

2700 to 10000 °K

2 YEAR GUARANTEE · 20000 Hrs · A+ ENERGY LEVEL · 175 - 265 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 220 ° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × L	Cap
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm	
T-Bulb LED Lamp	20	10465	6500	1900	95 ~ 100	> 70	> 80	< 7	220°	160	175 ~ 265	50 ~ 60	> 0.5	-10 ~ 40	63	80 × 142	E27
		10430	3000	1800	90 ~ 95												
	30	10565	6500	3000	100 ~ 105					232					98	100 × 167	
		10530	3000	2850	95 ~ 100												
	40	11165	6500	4000	100 ~ 105					310					150	122 × 190	
		11130	3000	3800	95 ~ 100												
	50	10665	6500	4750	95 ~ 100					380					210	138 × 233	
		10630	3000	4500	90 ~ 95												

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE · RoHS · ErP


LEVIN
GERMANY

LED Candle Lamps

Applications

- ✓ Residential
- ✓ Chandeliers with E14 cap
- ✓ Decorative lighting
- ✓ Hotels



T-Candle LED Lamp



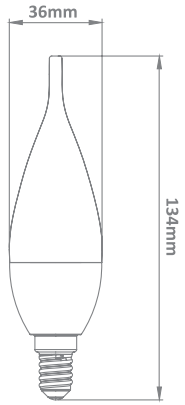

6W

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · A+ ENERGY LEVEL · 175 - 265 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 220° · CRI +70 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D×L	Cap
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm	
T-Candle LED Lamp	6	11465	6500	600	100~105	>70	>70	<7	220°	55	175~265	50~60	>0.6	-10~40	25	36×134	E14
		11430	3000	570	95 ~100												

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



Candle LED Lamp



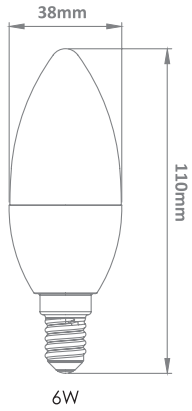

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · A+ ENERGY LEVEL · 175 - 265 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 220° · CRI +70 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D×L	Cap
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm	
Candle LED Lamp	6	11465	6500	600	100 ~ 105	> 70	> 70	< 7	220°	55	175~265	50~60	> 0.6	-10~40	25	38×110	E14
		11430	3000	570	95 ~ 100												

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP


LEVIN
GERMANY

LED Halogen Lamps

Applications

- ✓ Residential
- ✓ Decorative lightening
- ✓ Hotels
- ✓ Shops



GU10 Halogen LED Lamp





2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · A+ ENERGY LEVEL · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 60° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × L	Socket
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm	
GU10 Halogen LED Lamp	6	11365	6500	560	95~100	>70	>80	<7	60°	55	220~240	50~60	>0.55	-10~40	30	50×58	GU10
		11330	3000	530	90~95												
	7	10865	6500	665	95~100												
		10830	3000	630	90~95												

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP

Indoor Lighting

LEVIN
GERMANY



LED Downlights and Spotlights

Applications

- ✓ Residential
- ✓ Showrooms
- ✓ Hotels
- ✓ Shops
- ✓ Museums
- ✓ Decorative lighting



LEVIN GERMANY

Recessed Spotlight





8W

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · ENERGY LEVEL A+ · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 15° 30° 45° 60° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
Recessed Spotlight	8	30265	6500	810	100 ~ 105	> 80	> 80	< 7	15° 30° 45° 60°	60	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	100	107 × 38 / 100
		30230	3000	760	95 ~ 100											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



LEVIN GERMANY

Recessed Downlight



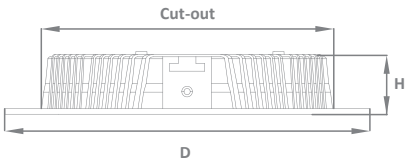

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
Recessed Downlight	8	30365	6500	600	75 ~ 80	> 80	> 80	< 7	120°	60	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	80	100 × 30 / 80
		30340	4000	600	75 ~ 80											
		30330	3000	560	70 ~ 75											
	12	30465	6500	1020	85 ~ 90					90	175 ~ 265				95	120 × 30 / 100
		30440	4000	1020	85 ~ 90											
		30430	3000	960	80 ~ 85											
	15	32465	6500	1275	85 ~ 90					113					100	145 × 30 / 115
		32440	4000	1275	85 ~ 90											
		32430	3000	1200	80 ~ 85											
	20	32565	6500	1700	85 ~ 90					151					160	175 × 30 / 150
		32540	4000	1700	85 ~ 90											
		32530	3000	1600	80 ~ 85											
	30	32665	6500	2550	85 ~ 90					212					230	220 × 30 / 190
		32640	4000	2550	85 ~ 90											
		32630	3000	2400	80 ~ 85											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



Recessed 3-Step Dimmable Downlight



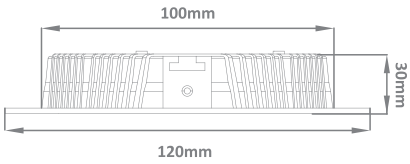

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · DIMMABLE · IP 20 · 120 ° · CRI +70 · SDCM < 3 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Code	Step	Power	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
			W	°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
Recessed 3-Step Dimmable Downlight	30565	1	11	6500	980	90 ~ 95	> 80	> 70	< 3	120°	85	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	95	120 × 30 / 100
		2	6		530						50						
		3	2		175						20						
	30530	1	11	3000	930	85 ~ 90					85						
		2	6		505						50						
		3	2		170						20						

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



3-Step Tunable White Downlight



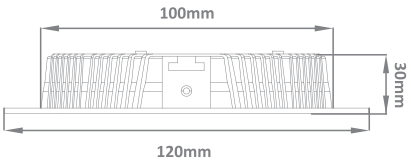

9w

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +70 · TW · SDCM < 3 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Code	Color Temperature	Power	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
		°K	W	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
3-Step Tunable White Downlight	30663	6500	9	745	85 ~ 90	> 70	> 70	< 3	120°	70	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	95	120 × 30 / 100
		4000		740	85 ~ 90											
		3000		680	75 ~ 80											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP


LEVIN
GERMANY

COB Lights

Applications

- ✓ High Ceilings
- ✓ Shopping Malls
- ✓ Hospitals
- ✓ Exhibition
- ✓ Warehouses



COB Downlights





2700 to 10000 °K



Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
	W		°K	lm	lm/W	%	%	-	-	V	Hz	λ	°C	g	mm
COB Downlights	7	70130	3000	610	85 ~ 90	> 80	> 80	< 7	60°	100 ~ 265	50 ~ 60	> 0.98	-20 ~ 45	142	94 x 41 / 70
		70140	4000	610	85 ~ 90										
		70165	6500	650	90 ~ 95										
	10	70230	3000	800	80 ~ 85									200	127 x 45.5 / 100
		70240	4000	800	80 ~ 85										
		70265	6500	850	85 ~ 90										
	15	70330	3000	1200	80 ~ 85									466	195 x 56 / 165
		70340	4000	1200	80 ~ 85										
		70365	6500	1275	85 ~ 90										
	20	70430	3000	1600	80 ~ 85									630	225 x 58 / 200
		70440	4000	1600	80 ~ 85										
		70465	6500	1760	85 ~ 90										

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

Adjustable LED Fullight Panels

Applications

- ✓ Office
- ✓ Clinic
- ✓ Hospital
- ✓ Conference hall
- ✓ Shopping center



Adjustable Round Panels



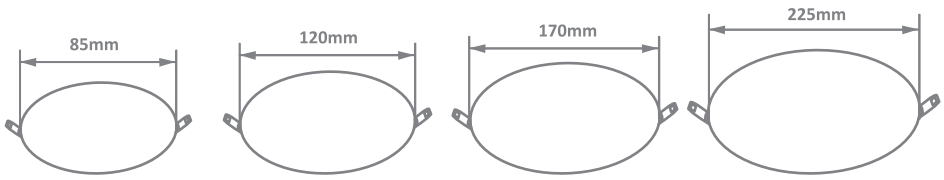

8W 18W 24W 36W

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H / Cut-out
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
Adjustable Round Panels	8	31530	3000	565	70 ~ 75	> 80	> 80	< 7	120°	55	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	67	85 × 25 / 45 ~ 75
		31565	6500	595	75 ~ 80											
	18	31630	3000	1450	80 ~ 85					134					80	120 × 25 / 45 ~ 105
		31665	6500	1530	85 ~ 90											
	24	31730	3000	1880	80 ~ 85					173					144	170 × 25 / 45 ~ 155
		31765	6500	1980	85 ~ 90											
	36	31830	3000	2735	75 ~ 80					252					190	225 × 25 / 45 ~ 205
		31865	6500	2880	80 ~ 85											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP



Adjustable Square Panels



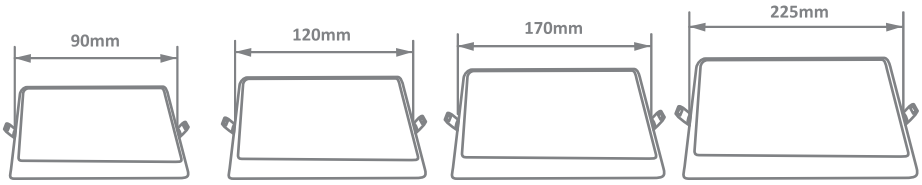

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension W × L × H / Cut-out
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
Adjustable Square Panels	8	31930	3000	565	70 ~ 75	> 80	> 80	< 7	120°	55	220 ~ 240	50 ~ 60	> 0.5	-10~ 40	70	90 × 85 × 20 / 40 ~ 75
		31965	6500	595	75 ~ 80											
	18	32030	3000	1450	80 ~ 85					134					85	120 × 120 × 20 / 40 ~ 105
		32065	6500	1530	85 ~ 90											
	24	32130	3000	1880	80 ~ 85					173					150	170 × 170 × 20 / 40 ~ 155
		32165	6500	1980	85 ~ 90											
	36	32230	3000	2735	75 ~ 80					252					200	225 × 225 × 23 / 40 ~ 205
		32265	6500	2880	80 ~ 85											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP


LEVIN
GERMANY

LED Panel Lights

Applications

- ✓ Office
- ✓ Clinic
- ✓ Hospital
- ✓ Conference hall
- ✓ Shopping center



Recessed 60×60 Panel



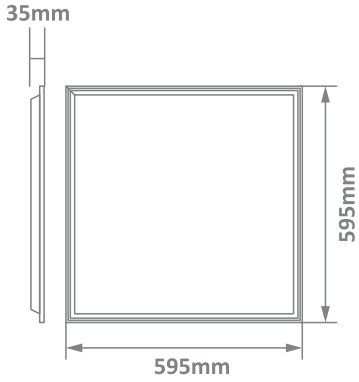

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +80 · SDCM < 3 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Type	Code	Color Temperature	Power	Current	Nominal Voltage	Frequency	PF	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Ta	Weight	Dimension W × L × H
			°K	W	mA	V	Hz	λ	lm	lm/W	%	%	-	-	°C	g	mm
Recessd 60×60 Panel	Backlit Recessed	30130	3000	45	250	220~240	50~60	>0.55	3300	75~80	>80	>80	<3	120°	-10~40	1400	595×595×35
				65	340				4000	65~70							
		30140	4000	45	250				3450	80~85							
				65	340				4150	65~70							
		30165	6500	45	250				3500	80~85							
				65	340				4200	65~70							

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE · RoHS · ErP



Recessed / Surface Mounting 60×60 Panel

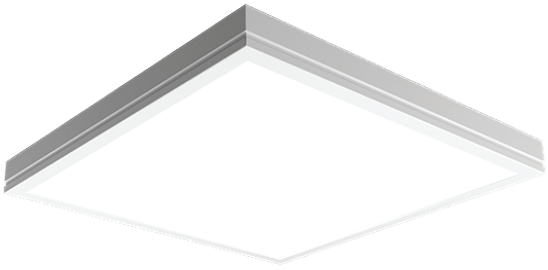

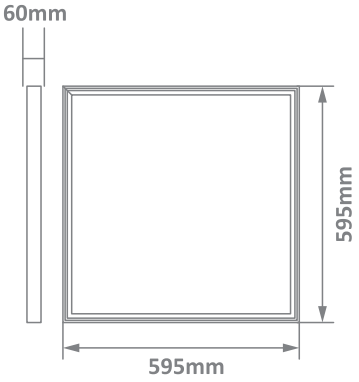

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +85 · SDCM < 3 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Type	Code	Color Temperature	Power	Current	Nominal Voltage	Frequency	PF	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Ta	Weight	Dimension W × L × H
			°K	W	mA	V	Hz	λ	lm	lm/W	%	%	-	-	°C	g	mm
Recessd / Surface Mounting 60×60 Panel	Backlit Recessed / Surface Mounting	30730	3000	45	300	220~240	50~60	>0.6	3900	85~90	>80	>85	<3	120°	-10~40	3000	595×595×60
				65	480				5700	90~95							
		30740	4000	45	300				4150	90~95							
				65	480				6000								
		30750	5000	45	300				4200	95~100							
				65	480				6100								

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP


LEVIN
GERMANY

LED Indoor Linear Light

Applications

- ✓ Corridor
- ✓ Office
- ✓ Showroom
- ✓ Hotel
- ✓ Warehouse
- ✓ Workshop
- ✓ Shopping center



Indoor Linear Light



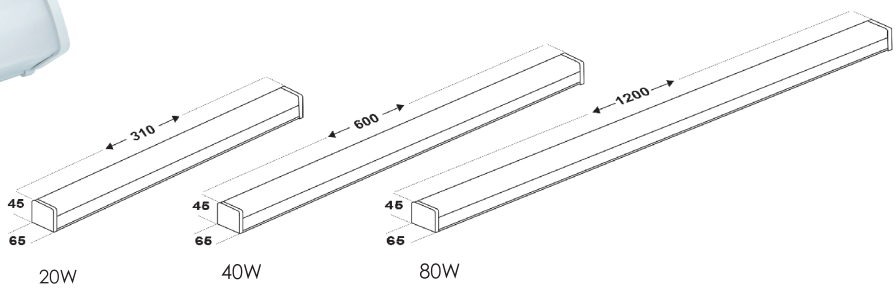

2700 to 10000 °K

2 YEARS GUARANTEE · 20000 Hrs · 220 - 240 VAC 50 - 60 Hz · -10 ~ +40 °c · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 20 · 120 ° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Voltage	Frequency	PF	Ta	Dimension L × W × H
	W		°K	lm	lm/W	%	%	-	-	V	Hz	λ	°C	mm
Indoor Linear Light	20	30830	3000	1600	80 ~ 85	> 80	> 80	< 7	120°	220 ~ 240	50 ~ 60	> 0.5	-10 ~ 40	310 × 65 × 45
		30865	6500	1700	85 ~ 90									
	40	30930	3000	3500	85 ~ 90									600 × 65 × 45
		30965	6500	3650	90 ~ 95									
	80	31430	3000	7000	90 ~ 95									1200 × 65 × 45
		31465	6500	7800	95 ~ 100									

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP

LED Indoor Strip Light

Applications

- ✓ Decorative lighting
- ✓ Restaurants
- ✓ Showrooms
- ✓ Hotels
- ✓ Shops



Indoor Strip Light

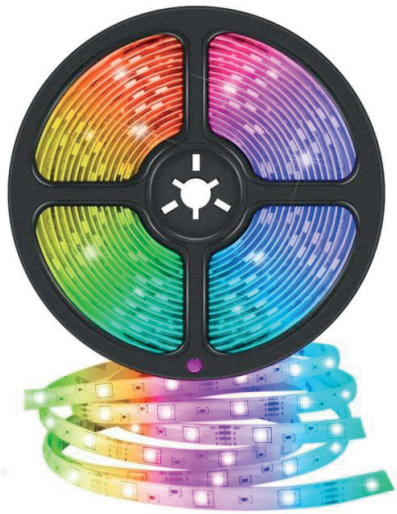



2 YEARS GUARANTEE · 25000 Hrs · -20 ~ +50 °c · 5050 RGB LED · DIMMABLE · IP 20 · 120° · CRI +70 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	IP	Code	Power	Luminous Flux	Luminous Efficiency	CRI	Beam Angle	LED		Frequency	Ta	Dimension L	Adaptor	Controller
	-		W / m	Lm/m	lm/W	%	-	Type	PCs/m	Hz	°C	m	-	-
5m Indoor Strip Light	IP20	901	5	400	> 75	> 70	120°	5050 RGB	60	50 ~ 60	-20 ~ 50	5	1 × 12V 2A EU	WiFi 24 keys RGB Single Output
10m Indoor Strip Light		903										10	1 × 12V 5A EU	WiFi 24 keys RGB Double Output

- The tolerance of the measured parameters is ±5%
- Different colors

CE · RoHS · ErP

Grow Light

Applications

- ✓ Greenhouse
- ✓ Indoor Farming

LEVIN GERMANY



Grow Light

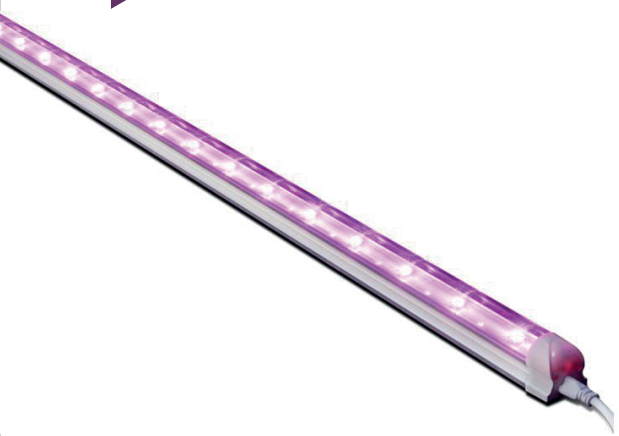

Levin grow light is an electric light to help plants grow. Grow lights either attempt to provide a light spectrum similar to that of the sun, or to provide a spectrum that is more tailored to the needs of the plants being cultivated. Levin grow light can be customized depending on the type of cultivated plant, the stage of cultivation (e.g. the germination/vegetative phase or the flowering/fruiting phase), and the photoperiod required by the plants which are desirable for use with specific plants and time periods.



Outdoor Lighting


LEVIN
GERMANY

LED Floodlights

Applications

- ✓ Facades
- ✓ Large outdoor areas
- ✓ Passages and public areas
- ✓ Stadiums
- ✓ Sport Fields
- ✓ Parks and gardens
- ✓ Billboards
- ✓ Warehouse



LED Floodlights





30W



50W



100W



150W

2700 to 10000 °K



Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Current	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension L × W × H
	W		°K	lm	lm/W	%	%	-	-	mA	V	Hz	λ	°C	g	mm
LED Floodlights	30	20165	6500	2800	95 ~ 100	> 80	> 80	< 7	120°	230	220 ~ 240	50 ~ 60	> 0.6	-20 ~ 50	590	215 × 145 × 30
		20130	3000	2600	90 ~ 95											
	50	20265	6500	4900	100 ~ 105					370					770	240 × 160 × 33
		20230	3000	4700	95 ~ 100											
	100	20365	6500	8000	90 ~ 95					640					1120	280 × 195 × 34
		20330	3000	7700	85 ~ 90											
	150	20465	6500	13500	95 ~ 100					1100					2000	375 × 255 × 36
		20430	3000	13000	90 ~ 95											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP

LED High Bay Light

Applications

- ✓ Halls
- ✓ Trads Fairs
- ✓ Exhibitions
- ✓ Warehouses
- ✓ High-Ceiling
- ✓ Manufacturing bays
- ✓ Industrial sites
- ✓ Pools

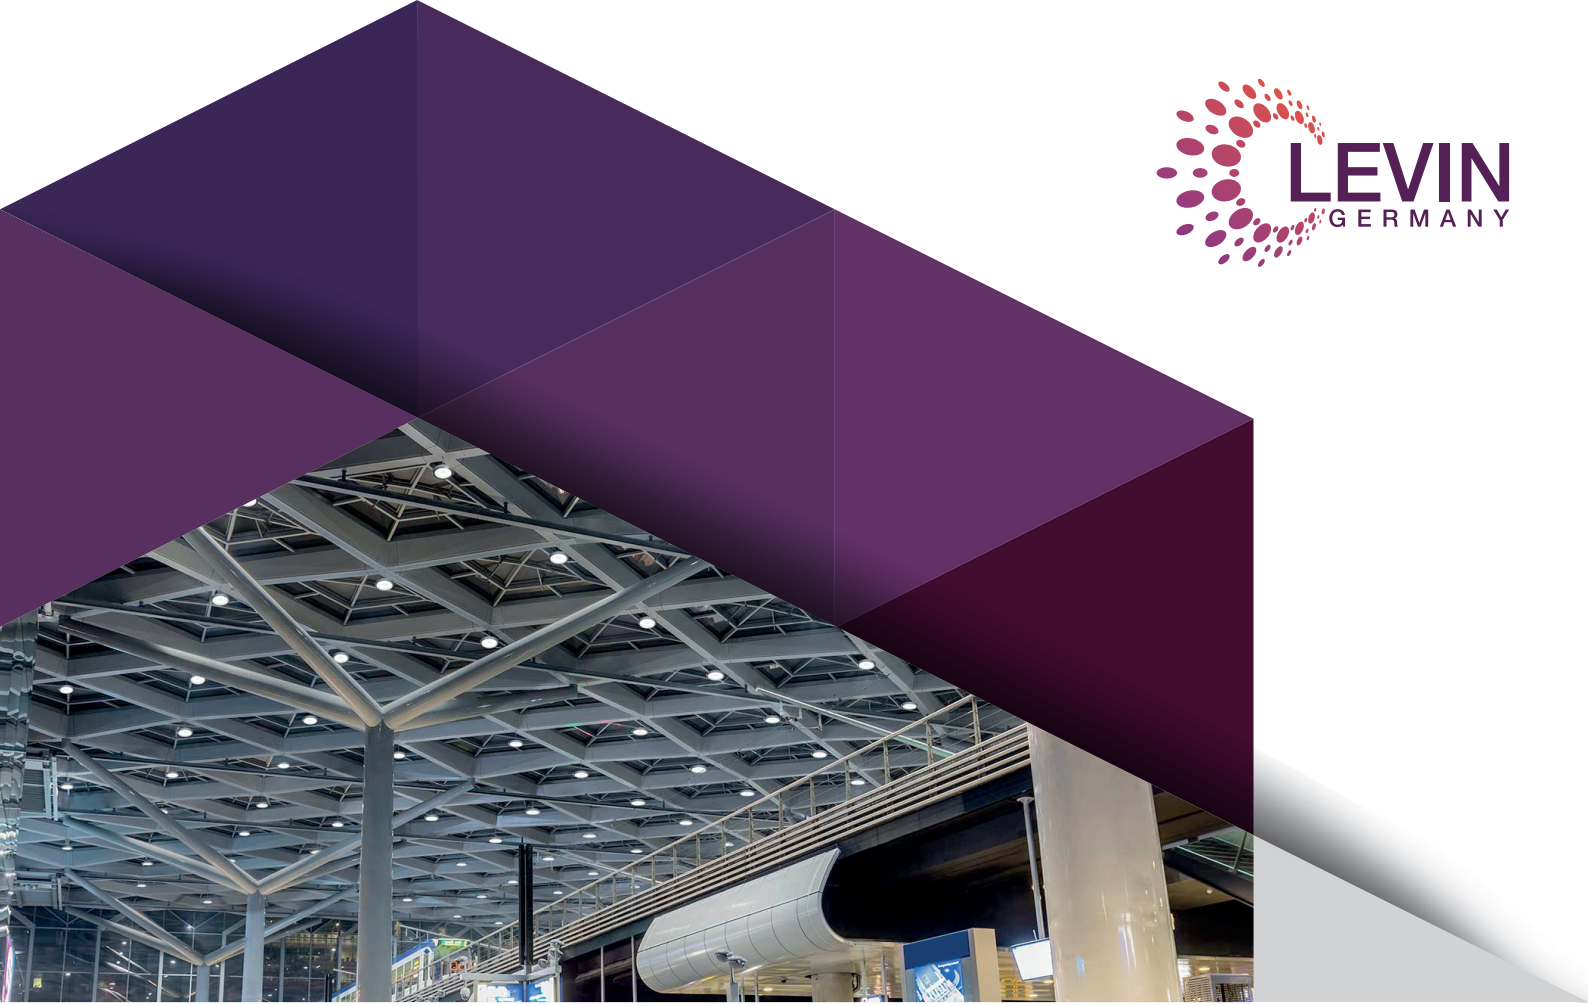

LED High Bay Light





100W



150W



200W

2700 to 10000 °K



Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension D × H
	W		°K	lm	lm/W	%	%	-	-	V	Hz	λ	°C	g	mm
LED High Bay Light	100	60130	3000	9500	95 ~ 105	> 80	> 80	< 7	60°, 90°, 120°	220 ~ 240	50 ~ 60	> 0.9	-20 ~ 45	2100	295 × 170
		60150	5000	10000	100 ~ 110										
	150	60230	3000	14250	95 ~ 105									3100	345 × 170
		60250	5000	15000	100 ~ 110										
	200	60330	3000	19000	95 ~ 105									4200	400 × 170
		60350	5000	20000	100 ~ 110										

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP

LED Wall Washer Light

Applications

- ✓ Facades
- ✓ Pillar facades
- ✓ Gate areas
- ✓ Billboards



Wall Washer Lights



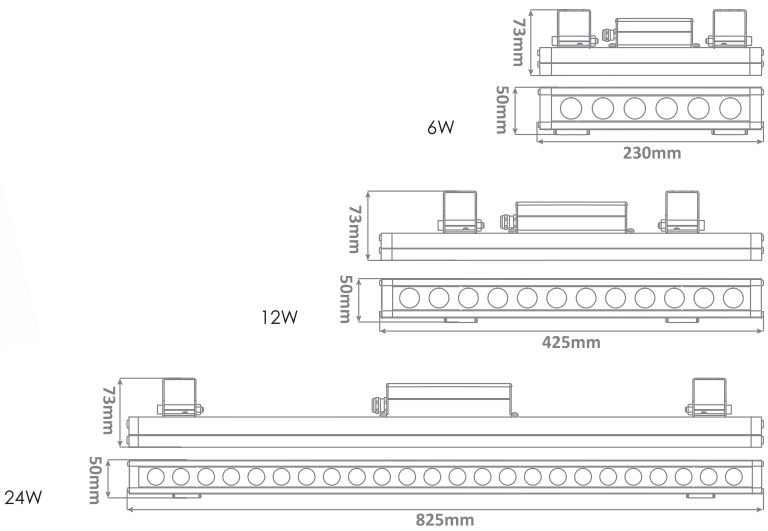

2700 to 10000 °K

2 YEARS GUARANTEE · 25000 Hrs · 195 - 240 VAC 50 - 60 Hz · Class I · -20 ~ +45 °C · FLICKER FREE · SMD LED · NOT DIMMABLE · IP 65 · 30 ° · CRI +70 · SDCM < 6 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Voltage	Frequency	PF	Ta	Weight	Dimension w × L × H
	W		°K	lm	lm/W	%	%	-	-	V	Hz	λ	°C	g	mm
Wall Washer Light	6	80130	3000	540	90 ~ 95	> 70	> 70	< 6	30°	195 ~ 240	50 ~ 60	> 0.5	-20 ~ 45	610	50 × 230 × 73
		80165	6500	570	95 ~ 100										
	12	80230	3000	1080	90 ~ 95									940	50 × 425 × 73
		80265	6500	1150	95 ~ 100										
	24	80330	3000	2160	90 ~ 95									1580	50 × 825 × 73
		80365	6500	2280	95 ~ 100										

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE · RoHS · ErP

LED Outdoor Linear Light

Applications

- ✓ Parking
- ✓ Warehouse
- ✓ Workshop
- ✓ Garage
- ✓ Corridor
- ✓ Wet location
- ✓ Shopping center



IP66 Outdoor Linear LED Light



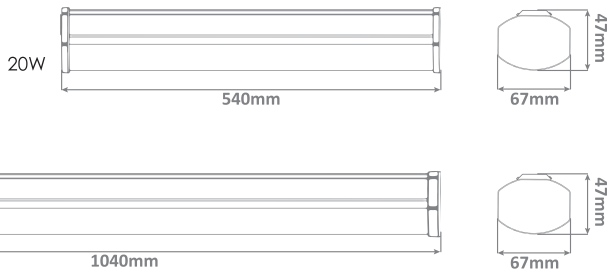

2700 to 10000 °K

2 YEARS GUARANTEE · 25000 Hrs · 175 - 245 VAC 50 - 60 Hz · -20 ~ +45 °c · SMD LED · NOT DIMMABLE · IP 65 · 120 ° · CRI +80 · SDCM < 7 · ENVIRONMENT FRIENDLY · NO UV/IR RAYS

Name	Power	Code	Color Temperature	Luminous Flux	Luminous Efficiency	Lumen Maintenance	CRI	SDCM	Beam Angle	Nominal Voltage	Frequency	PF	Ta	Dimension L × W × H
	W		°K	lm	lm/W	%	%	-	-	V	Hz	λ	°C	mm
IP66 Outdoor Linear LED Light	20	31230	3000	1950	95 ~ 100	> 80	> 80	< 7	120 °	175 ~ 245	50 ~ 60	> 0.5	-20 ~ 45	540 × 67 × 47
		31265	6500											
	38	31330	3000	3500										1040 × 67 × 47
		31365	6500											

- The tolerance of the measured parameters is ±5%
- Customized options are available: Different color temperatures (2700 to 10000 °K), and CRI > 90

CE RoHS ErP

Icons Appendix

Icons Appendix



Guarantee
Guaranteed for X years.



Lifetime
The lifetime of the product is X hours.



Ambient Temperature
Minimum and maximum range of ambient temperature.



Standard Deviation Color Matching (SDCM)
The SDCM of product is less than X.



Color Rendering Index (CRI)
The CRI of product is more than X.



Dimmable
Dimmable or can be used with dimmable devices.



Non-Dimmable
Not dimmable or cannot be used with dimmable devices.



Tunable White
Tunable or can be used with Tunable devices.



Beam Angle
The beam angle of the product is X.



LED Technology
SMD LED technology is used.



Flicker Free
Has no flicker.



Supply Voltage
X and Y represent the allowed supply voltage and frequency range, respectively.



Ingress Protection (IP)
Enclosure tested for IPX; the IP level of the final cable connection shall be guaranteed by installer.



Environment Friendly
Has no or the least possible impact on the environment.



No UV or IR Radiation
Has no ultraviolet or infrared radiation.



Power Factor
The power factor is more than X.

LEVIN
GERMANY

